


## DATA SHEET

P/N	DESCRIPTION	
DPI780701X25123S	POWER DIVIDER INDUCTION 50Ω, 1 IN 7/8", 2 OUT 7/16 3 JUMPS	
ELECTRICAL DATA	NOTES	
IMPEDANCE	50Ω	
FREQUENCY RANGE	470 - 860MHz	
MAX POWER	5KW	
LINE DERIVATIVE	2	
V.S.W.R.	1.06	FULL BAND
ATTENUATION	0.2 ÷ 0.5	OVER COUPLING
DC CAPABILITY	NO DC BLOCK	
MECHANICAL SPECIFICATIONS	NOTES	
INPUT CONNECTORS	7/8"	
OUTPUT CONNECTORS	7/16	
MATERIAL DATA		
CONNECTOR PART	MATERIAL	PLATING
CONNECTOR BODY	BRASS	
BODY	BRASS	
CONTACT 7/8"	BRASS	
CONTACT 7/16	BERYLLIUM COPPER	
DIELECTRIC	PTFE	
2002/95/EC (RoHS)	COMPLIANT	

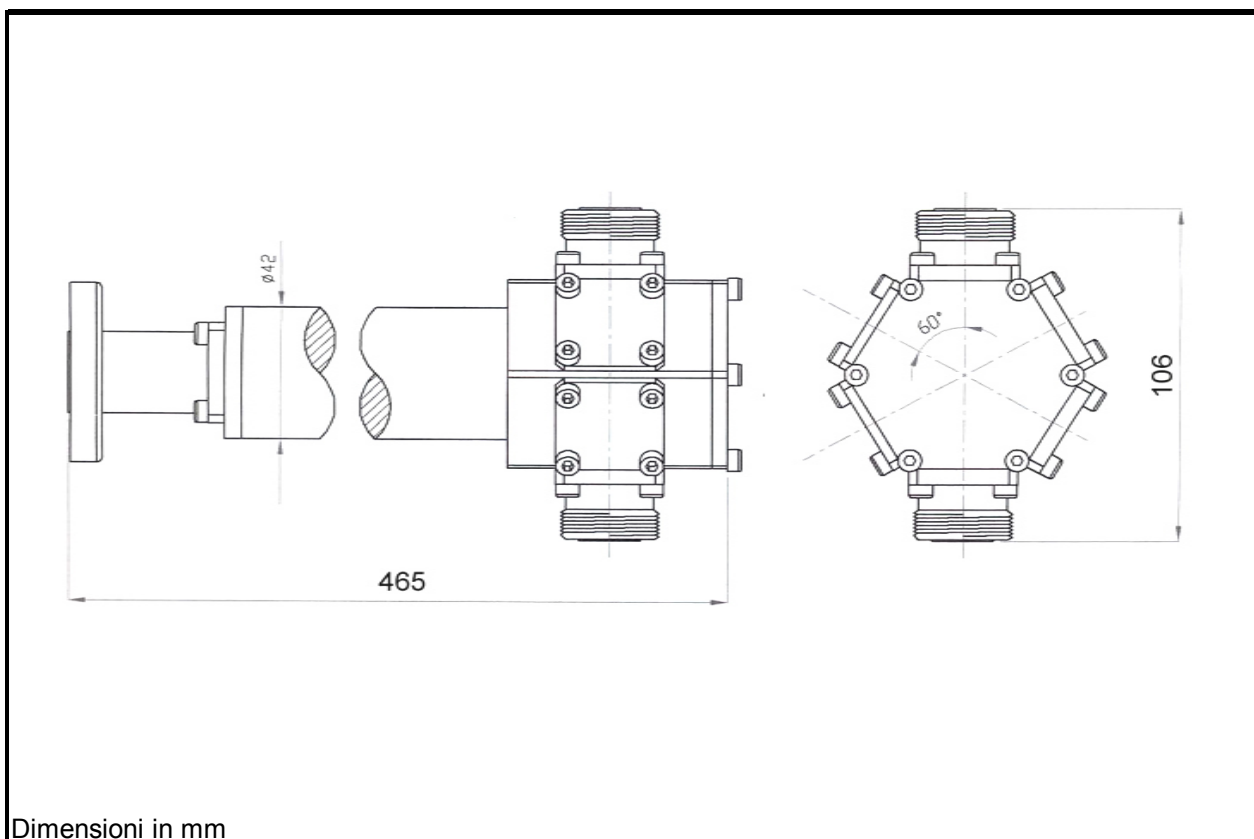

Dimensioni in mm